



Samsung Video Wall Displays

VHR-R, VHT-E, VMT-E, VMT-U series

An immersive viewing experience for any business


Samsung's VHR-R, VHT-E, VMT-E, VMT-U series video wall displays provide a captivating viewing experience for a wide variety of business settings. The displays' exceptionally slim depth, continuous operation capability and IP5X certification provide endless possibilities for retail stores, office spaces, public spaces and more. Built to operate all day, Samsung's video walls ensure businesses have an effective communication channel, even after traditional business hours. With wide viewing angles and special anti-glare panels Samsung's video wall display demand attention, even in bright ambient light, ensuring every word and image is as legible as it is impressive.

Why use Samsung's video wall displays for your business?




Fit for Any Environment

The displays' slim depth gives businesses ultimate flexibility in creating a video wall that is perfectly suited to their needs and can be implemented in any location. IP5X certification ensures the display is completely dust resistant and can deliver a dependable viewing experience in a wide range of conditions. It also allows for video wall installation in public spaces without the need for additional dust-resistant molding.

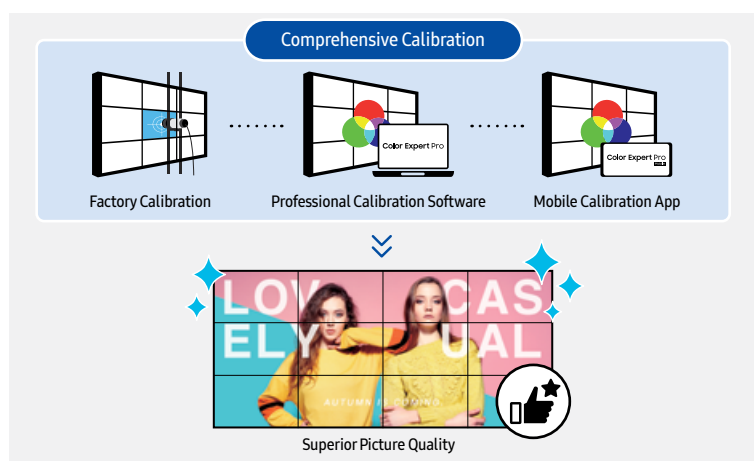

Flawless uniformity

To ensure outstanding picture quality, all Samsung video wall displays are fine-tuned with a strict multi-step calibration process. Users may also adjust detailed settings to suit their individual needs using Samsung's free powerful software, Color Expert Pro. For businesses needing a simpler solution, Color Expert Pro Mobile makes for quick and easy calibration using a mobile device camera.

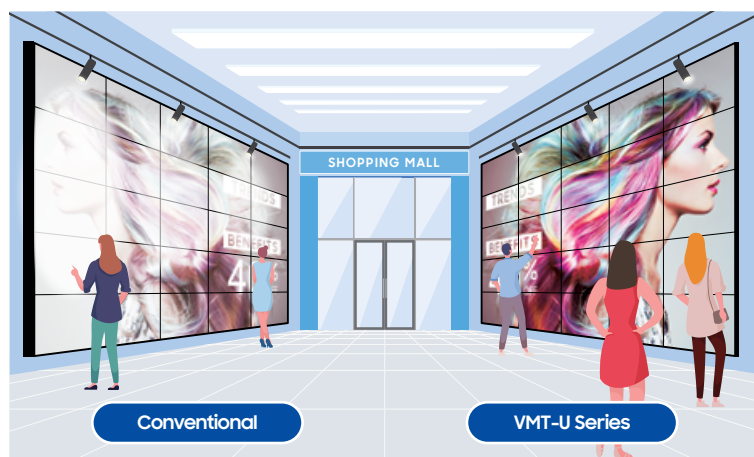



Vivid viewing in any location

Samsung video walls feature wide viewing angles allowing viewers to see vivid content from any position. It eliminates potential distortion, ensuring colors, logos, fonts and messages are aligned with business' brand guidelines. Anti-glare panels maintain vibrant and accurate visuals, preventing any disruption from bright lights, sunlight or glare any time of the day or night.

Samsung's lineup of video wall displays

Every business has different needs, which is why Samsung provides a range of video wall options with various levels of brightness, bezel widths and cabinet depths. Every one of our video wall models are guaranteed to deliver the vivid picture quality and reliable performance Samsung is known for. Additionally, all of our displays are easy to install, further reducing complexity for business owners.



	Razor narrow bezel	Extreme narrow bezel		Ultra narrow bezel
 Series	 VHR-R Series	 VHT-E Series	 VMT-E Series	 VMT-U Series
 B-to-B Width	0.88mm	1.8mm	1.8mm	3.5mm
 Brightness	700 nit	700 nit	500 nit	500 nit
 Depth	69.9mm / 2.75"	70mm 70mm / 2.76"	70mm / 2.76"	46" 69.9mm / 2.75" 55" 73.1mm / 2.88"
 Viewing Angle (Vertical / Horizontal)	178° / 178°	178° / 178°	178° / 178°	178° / 178°
 Calibration	PC & Mobile supported	PC & Mobile supported	PC & Mobile supported	PC & Mobile supported
 Other Keywords	IP5X ISTA-6A —	IP5X ISTA-6A —	IP5X ISTA-6A —	IP5X ISTA-6A Center IR

Key features



Captivate audiences through a narrow Bezel

A razor-narrow 0.88mm* bezel-to-bezel design creates an uninterrupted visual experience across multiple screens. Minimizing the visual distraction of the screens themselves, the displays present a single, uniform picture that captures attention and keeps viewers focused on featured messages.

* Bezel width varies by video wall model.



Adaptable slender design


The exceptionally thin 69.9mm/ 2.75" * cabinet depth provides businesses with more flexibility to create the exact video wall they need and install it in the most impactful location. The thoughtful design blends in seamlessly and transforms any location with powerful visuals.

*Exact cabinet depth varies by video wall model.



View content from any angle

Wide viewing angles mean content is easily visible even if viewers aren't standing directly in front of the display. Audiences can get clear details and vivid colors regardless of where the screen is located.

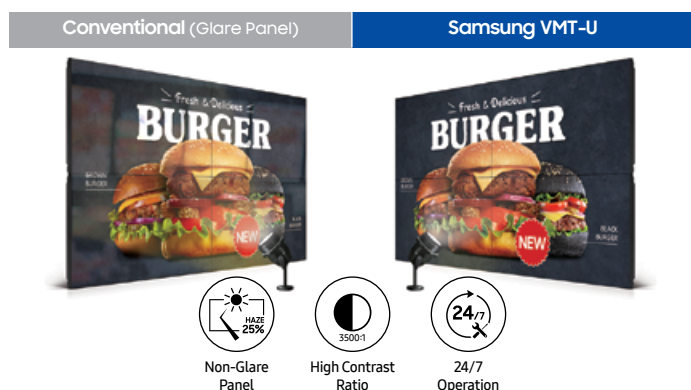


Vibrant images in any light

Non-glare panels evenly distribute light across the screen to maintain vibrant and accurate content. Combined with a high contrast ratio and 24/7 operation, visuals are vivid and eye-catching any time of the day or night — regardless of ambient light.



Image enhancement

Samsung's powerful picture enhancement technology ensures all content is vibrant and clear. With Picture Enhancer mode, color saturation and contrast are improved by adjusting the gamma curve. Using Black Equalizer mode, dark images are lightened, making details easier to see.

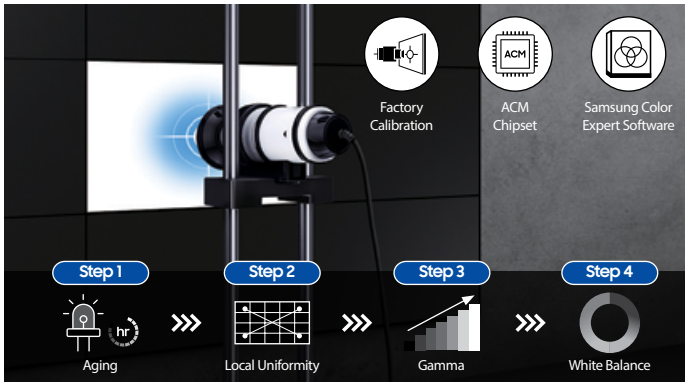

Comprehensive calibration

Multi-step factory calibration process tunes video walls to uniform brightness and color throughout multiple displays. In addition to rigorous factory calibration, users can also manage brightness and color uniformity with Samsung's Color Expert Pro, a powerful free software program.



Convenient mobile calibration


For users who seek quick and simple video wall settings, Samsung's Color Expert Pro Mobile enables an easy video wall calibration using a mobile camera. With the solution's intuitive UI, even non-expert users can adjust up to 5x5 video wall's white balance simultaneously without the need for additional equipment.



Built durable and user-friendly



IP5x certified, Samsung video walls are dust-resistant and able to withstand a range of environmental conditions without needing to prepare additional enclosure in dusty places. An embedded, centrally located infrared receiver (IR)* allows for easier and more flexible user control.

*Center IR support varies by each video wall model.

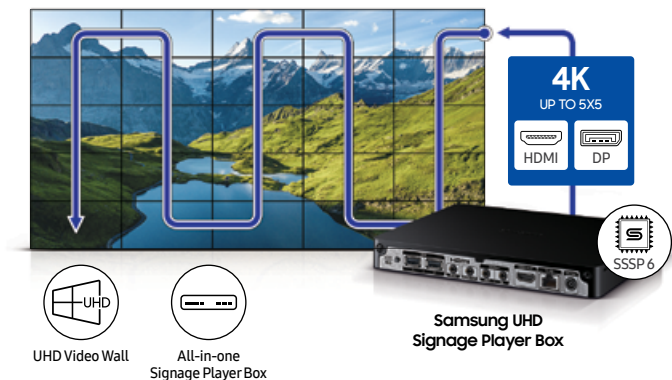

Advanced presentation, simplified operation

Utilizing daisy chain design through DisplayPort 1.2 or HDMI ports enable Samsung video wall displays to present UHD content on multiple screens without an external graphic card. Samsung's UHD Signage Player Box streamlines functionality by combining the media player and content management software.

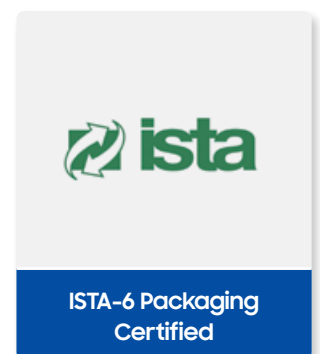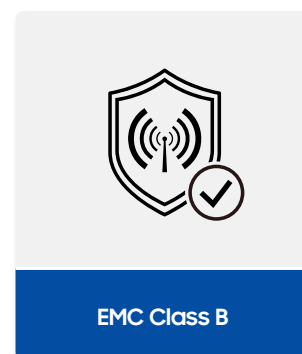

Industry standard certified

Samsung's video wall displays are EMC class B compliant*, which ensures a safe viewing environment by meeting strict standards of electromagnetic wave emission. The display packaging also underwent a rigorous ISTA lab 4-step test and is designed to minimize possible damage during delivery.

*EMC class B certification varies by video wall model.

Business applications





Specifications

Model			VH55R-R	VH55T-E	
Panel	Diagonal Size	Class	55"	55"	
		Measured	54.6" /138.7cm	54.6" /138.7cm	
	Type		IPS	IPS	
	Resolution		1920 *1080	1920 *1080	
	Pixel Pitch(mm)		0.63mm(H) * 0.63mm(V)	0.63mm(H) * 0.63mm(V)	
	Active Display Area(mm)		1209.6mm * 680.4mm	1209.6mm * 680.4mm	
	Brightness		Max 700 cd/m²	Max 700 cd/m²	
	Contrast Ratio		1100:1	1,200:1	
	Viewing Angle(H/V)		178/178	178/178	
	Response Time(G-to-G)		8ms	8ms	
	Display Colors		8 bit -16.7M	8 bit -16.7M	
	Color Gamut		72%	72%	
	Operation Hour		24/7	24/7	
	Display	Haze		28%	28%
		Dynamic C/R		30,000:1	500,000:1
H-Scanning Frequency		57.3kHz ~ 70kHz	57.3kHz ~ 70kHz		
V-Scanning Frequency		48Hz ~ 75Hz	48Hz ~ 75Hz		
Maximum Pixel Frequency		78MHz	77MHz		
Sound	Speaker Type		N/A	N/A	
Connectivity	INPUT	RGB	DVI-D, Display Port 1.2	DVI-D, Display Port 1.2	
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	
		HDCP	HDCP 2.2	HDCP 2.2	
		AUDIO	Stereo mini Jack	Stereo mini Jack	
		USB	Only F/W upgrade	Only F/W upgrade	
	OUTPUT	RGB	DP1.2(Loop-out)	DP1.2(Loop-out)	
		VIDEO	N/A	N/A	
		AUDIO	Stereo mini Jack	Stereo mini Jack	
		Power Out	N/A	N/A	
	EXTERNAL CONTROL		RS232C(in/out), RJ45	RS232C(in/out), RJ45	
EXTERNAL SENSOR		Detachable type(IR)	Detachable type(IR)		
Power	Tuner		N/A	N/A	
	Type		Internal	Internal	
	Power Supply		AC100 - 240 V~, 50/60 Hz	AC100 - 240 V, 50/60 Hz	
	Power Con- sumption	Max[W/h]	270W	270W	
		Typical [W/h]	153W	116W	
		BTU(Max)	921	921	
		Sleep Mode	less than 0.5Ws	less than 0.5W	
Off Mode		less than 0.5W	less than 0.5W		
Mechanical Spec	Dimension (mm/in)	Set	1211.0 x 681.7 x 69.9 / 47.68" x 26.84" x 2.75"	1211 x 681.7 x 70 /47.68" x 26.84" X 2.76"	
		Package	1414 x 844 x 257/55.67" x 33.33" X10.12"	1398 x 844 x 257 / 55.04" x 33.33" X10.12"	
	Weight	Set	16.8 kg / 37.03 lb	19.4 kg / 42.77 lb	
		Package	25.1 kg / 55.33 lb	27.6 kg / 60.85 lb	
	VESA Mount		600 * 400 (mm)	600 * 400 (mm)	
	Protection Glass		N/A	N/A	
	Stand Type		N/A	N/A	
	Bezel Width (mm)		0.44mm (Even)	0.9mm (Even)	
Operation	Operating Temperature		0°C~ 40°C	0°C~ 40°C	
	Humidity		10~80%	10~80%	
Feature	Key		Razor Narrow Bezel	Extreme Narrow Bezel	
	Special		ACM Support(Advanced Color Management), Auto Source Switching & Recovery, Haze 28%, Temperature Sensor, RS232C/RJ45 MDC,Plug and Play (DDC2B), Video Wall(15x15(OSD)), Video Wall Daisy Chain(10x10), Pivot Display, Image Rotation, Button Lock, DP1.2 Digital Daisy Chain(Supporting UHD Resolution, HDCP support), Smart F/W update, Clock Battery(168hrs Clock Keeping), IP5X tested, EMC Class B	ACM Support(Advanced Color Management), Auto Source Switching & Recovery, Haze 28%, Temperature Sensor, RS232C/RJ45 MDC,Plug and Play (DDC2B), Video Wall(15x15(OSD)), Video Wall Daisy Chain(10x10), Pivot Display, Image Rotation, Button Lock, DP1.2 Digital Daisy Chain(Supporting UHD Resolution, HDCP support), Smart F/W update, Clock Battery(168hrs Clock Keeping), IP5X tested, EMC Class A	
			N/A	N/A	
Certification	Safety		UL (USA) : UL 60950-1	UL (USA) : UL 60950-1	
	EMC		FCC (USA) : FCC Part15, Subpart B class A.	FCC (USA) :FCC Part15, Subpart B class A.	
	IP rating		IP5X	IP5X	
	Environment		N/A	N/A	
accessories	Included		Quick Setup Guide, Warranty Card, DP cable, stereo to DB9 cable, Power Cord, Remote Controller, Batteries, External IR	Quick Setup Guide, Warranty Card, DP cable, stereo to DB9 cable, Power Cord, Remote Controller, Batteries, External IR	
	optional	Stand	N/A	N/A	
		Mount	WMN-55VD	WMN-55VD	
		Specialty	N/A	N/A	
Media Player Option Type			Signage player box	Signage player box	

Model			VM55T-E	VM46T-U	VM55T-U		
Panel	Diagonal Size	Class Measured	55"	46"	55"		
			54.6" /138.7cm	45.9" /116.8cm	54.6" /138.7cm		
	Type		IPS	IPS	IPS		
	Resolution		1920 * 1080	1920 * 1080	1920 * 1080		
	Pixel Pitch(mm)		0.63mm(H) * 0.63mm(V)	0.53025mm(H) * 0.53025mm(V)	0.63mm(H) * 0.63mm(V)		
	Active Display Area(mm)		1209.6mm * 680.4mm	1018.08mm * 572.67mm	1209.6mm * 680.4mm		
	Brightness		Max 500 cd/m²	Max 500 cd/m²	Max 500 cd/m²		
	Contrast Ratio		1,200:1	1,200:1	1,200:1		
	Viewing Angle(H/V)		178/178	178/178	178/178		
	Response Time(G-to-G)		8ms	8ms	8ms		
	Display Colors		8 bit - 16.7M	8 bit - 16.7M	8 bit - 16.7M		
	Color Gamut		72%	72%	72%		
	Operation Hour		24/7	24/7	24/7		
	Haze		28%	25%	25%		
Display	Dynamic C/R		500,000:1	45,000:1	45,000:1		
	H-Scanning Frequency		57.3kHz ~ 70kHz	57.3kHz ~ 70kHz	57.3kHz ~ 70kHz		
	V-Scanning Frequency		48Hz ~ 75Hz	48Hz ~ 75Hz	48Hz ~ 75Hz		
	Maximum Pixel Frequency		77MHz	82MHz	82MHz		
Sound	Speaker Type		N/A	N/A	N/A		
Connectivity	INPUT	RGB	DVI-D, Display Port 1.2	DVI-D, Display Port 1.2	DVI-D, Display Port 1.2		
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)		
		HDCP	HDCP 2.2	HDCP 2.2	HDCP 2.2		
		AUDIO	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack		
		USB	Only F/W upgrade	Only F/W upgrade	Only F/W upgrade		
	OUTPUT	RGB	DP1.2(Loop-out)	DP1.2(Loop-out)	DP1.2(Loop-out)		
		VIDEO	N/A	N/A	N/A		
		AUDIO	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack		
		Power Out	N/A	N/A	N/A		
	EXTERNAL CONTROL		RS232C(in/out), RJ45	RS232C(in/out), RJ45	RS232C(in/out), RJ45		
	EXTERNAL SENSOR		Detachable type(IR)	Detachable type(IR)	Detachable type(IR)		
Power	Tuner		N/A	N/A	N/A		
	Type		Internal	Internal	Internal		
	Power Supply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V~, 50/60 Hz	AC100 - 240 V, 50/60 Hz		
	Power Consumption	Max[W/h]	242W	176W	242W		
		Typical [W/h]	90W	111W	136W		
		BTU(Max)	825	600	825		
		Sleep Mode	less than 0.5W	less than 0.5W	less than 0.5W		
Off Mode		less than 0.5W	less than 0.5W	less than 0.5W			
Mechanical Spec	Dimension (mm/in)	Set	1211 x 681.7 x 70 / 47.68" x 26.84" x 2.76"	1022.1 x 576.6 x 69.9 / 40.24" X 22.70" x 2.75"	1211 x 681.7 x 70 / 47.68" x 26.84" x 2.88"		
		Package	1398 x 844 x 257 / 55.04" x 33.23" x 10.12"	1193 x 719 x 257 / 46.97" x 28.31" x 10.12"	1398 x 844 x 257 / 55.04" x 33.23" x 10.12"		
	Weight	Set	19.4 kg / 42.77 lb	15.7 kg / 34.61 lb	21.2 kg / 46.73 lb		
		Package	27.6 kg / 60.85 lb	22.2 kg / 48.94 lb	23.8 kg / 52.47 lb		
	VESA Mount		600 * 400 (mm)	600 * 400 (mm)	600 * 400 (mm)		
	Protection Glass		N/A	N/A	N/A		
	Stand Type		N/A	N/A	N/A		
	Bezel Width (mm)		0.9mm (Even)	2.25mm(U/L), 1.25mm(R/B)	2.3mm(U/L), 1.2mm(R/B)		
Operation	Operating Temperature		0°C~ 40°C	0°C~ 40°C	0°C~ 40°C		
Feature	Humidity		10~80%	10~80%	10~80%		
	Key		Extreme Narrow Bezel	Ultra Narrow Bezel	Ultra Narrow Bezel		
	Special	ACM Support(Advanced Color Management), Auto Source Switching & Recovery, Haze 28%, Temperature Sensor, RS232C/ RJ45 MDC,Plug and Play (DDC2B), Video Wall(15x15(OSD)), Video Wall Daisy Chain(10x10), Pivot Display, Image Rotation, Button Lock, DP1.2 Digital Daisy Chain(Supporting UHD Resolution, HDCP support), Smart F/W update, Clock Battery(168hrs Clock Keeping), IP5X tested, EMC Class A		ACM Support(Advanced Color Management), Auto Source Switching & Recovery, Haze 28%, Temperature Sensor, RS232C/ RJ45 MDC,Plug and Play (DDC2B), Video Wall(15x15(OSD)), Video Wall Daisy Chain(10x10), Pivot Display, Image Rotation, Button Lock, DP1.2 Digital Daisy Chain(Supporting UHD Resolution, HDCP support), Smart F/W update, Clock Battery(168hrs Clock Keeping), IP5X tested, EMC Class A, Center IR		ACM Support(Advanced Color Management), Auto Source Switching & Recovery, Haze 28%, Temperature Sensor, RS232C/ RJ45 MDC,Plug and Play (DDC2B), Video Wall(15x15(OSD)), Video Wall Daisy Chain(10x10), Pivot Display, Image Rotation, Button Lock, DP1.2 Digital Daisy Chain(Supporting UHD Resolution, HDCP support), Smart F/W update, Clock Battery(168hrs Clock Keeping), IP5X tested, EMC Class A, Center IR	
		Internal Player (Embedded H/W)		N/A	N/A	N/A	
		Safety		UL (USA) : UL 60950-1	UL (USA) : UL 60950-1	UL (USA) : UL 60950-1	
Certification	EMC		FCC (USA) :FCC Part15, Subpart B class A.	FCC (USA) :FCC Part15, Subpart B class A.	FCC (USA) :FCC Part15, Subpart B class A.		
	IP rating		IP5X	IP5X	IP5X		
	Environment		N/A	N/A	N/A		
	accessories	Included		Quick Setup Guide, Warranty Card, DP cable, stereo to DB9 cable, Power Cord, Remote Controller, Batteries, External IR	Quick Setup Guide, Warranty Card, DP cable, stereo to DB9 cable, Power Cord, Remote Controller, Batteries, External IR	Quick Setup Guide, Warranty Card, DP cable, stereo to DB9 cable, Power Cord, Remote Controller, Batteries, External IR	
optional		Stand	N/A	N/A	N/A		
		Mount	WMN-55VD	WMN-46VD	WMN-55VD		
		Specialty	N/A	N/A	N/A		
Media Player Option Type			Signage player box	Signage player box	Signage player box		

