

ELEMENT 485

15.1" POS Terminal





15.1"

A close-up photograph of a black, industrial-grade mechanical stand. The image shows a joint where a horizontal arm connects to a vertical support. The components are made of dark, matte-finished metal or plastic, featuring several circular holes for screws or bolts. A blue, semi-transparent wireframe mesh is overlaid on the upper left portion of the image, suggesting a digital or engineering context. The background is a plain, light blue.

Quick Service

Tool-less stand design for easy service.

VESA Compatible

Compatible with 75/100
VESA mount.



Easy Maintenance

Rear service door for storage expansion card.



Wide Selection of Peripherals



Compatible on 2 Sides
Optional Peripherals



Fingerprint



NFC




Scanner





MSR

I/O Ports

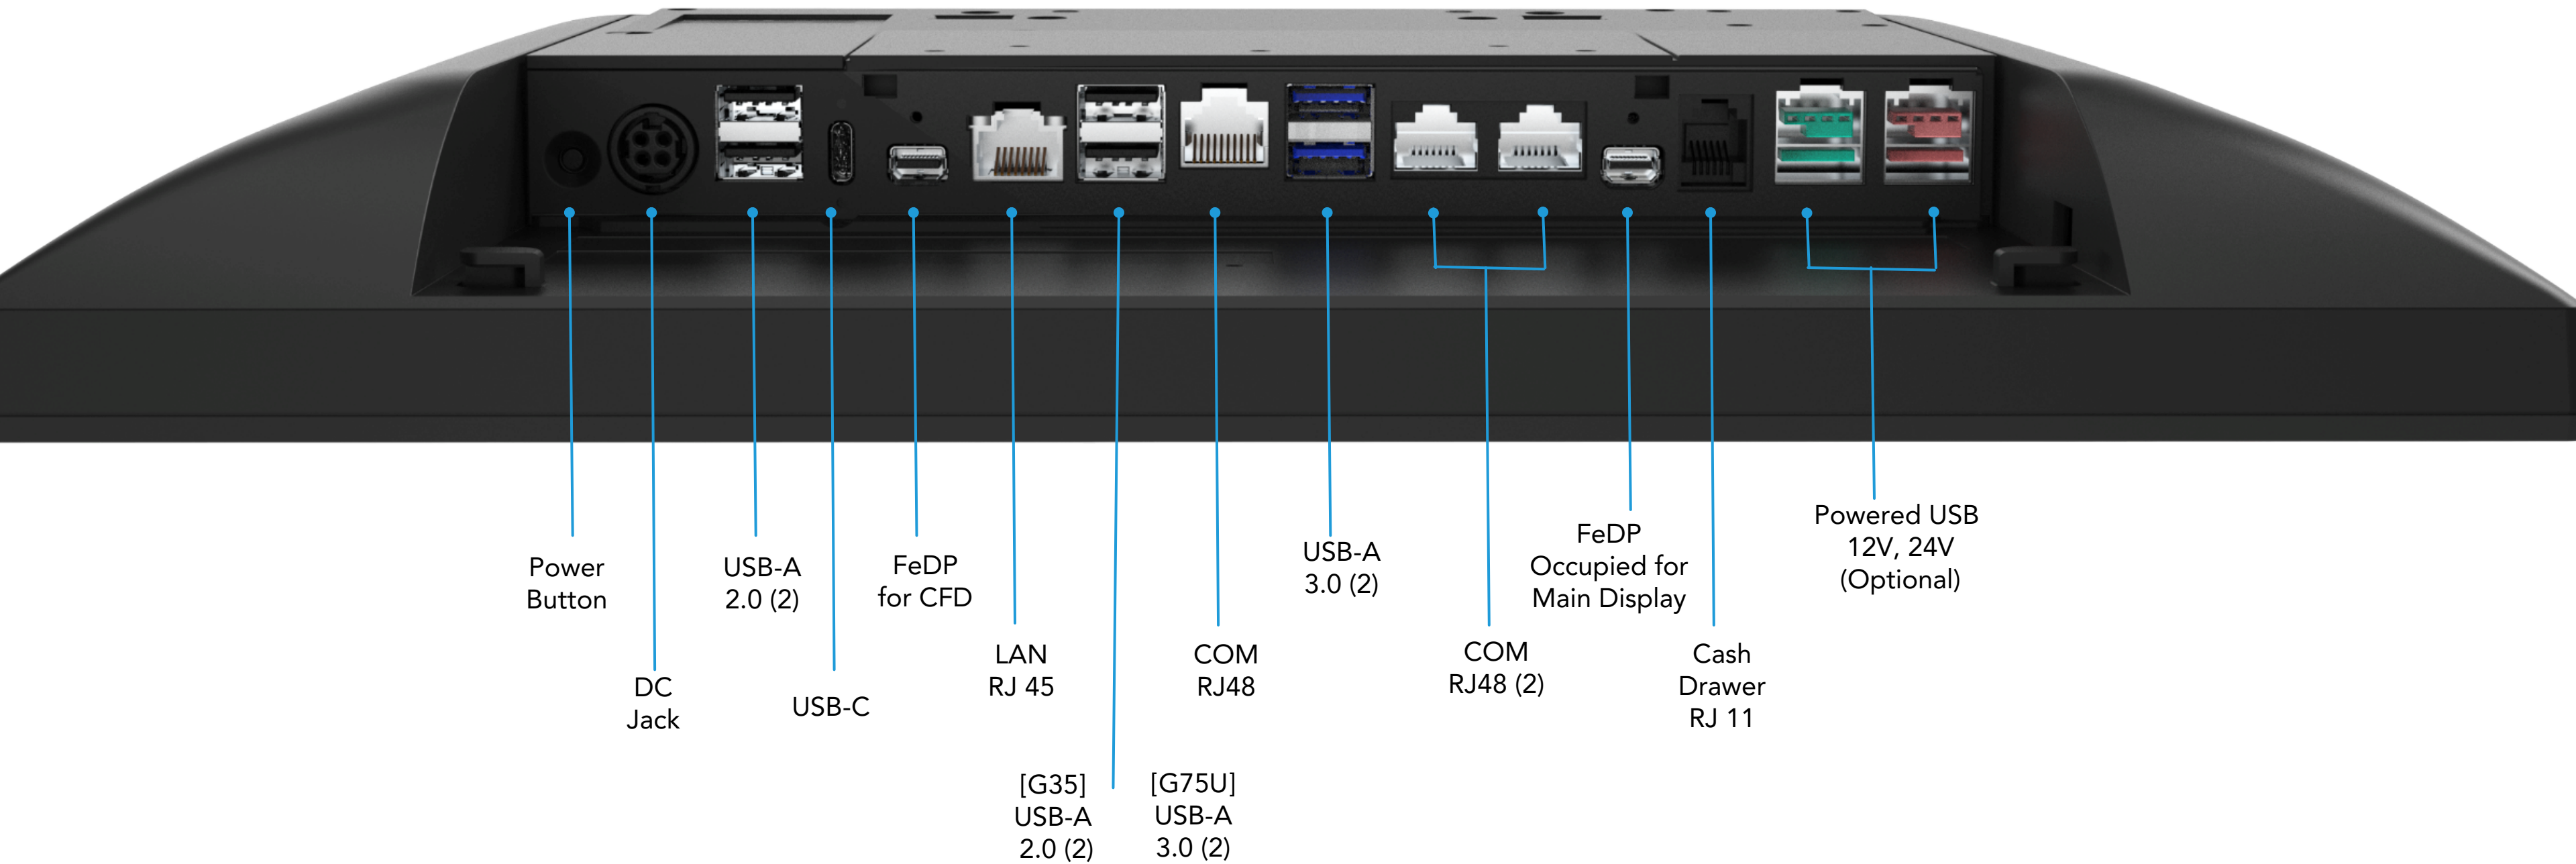

Product Dimension

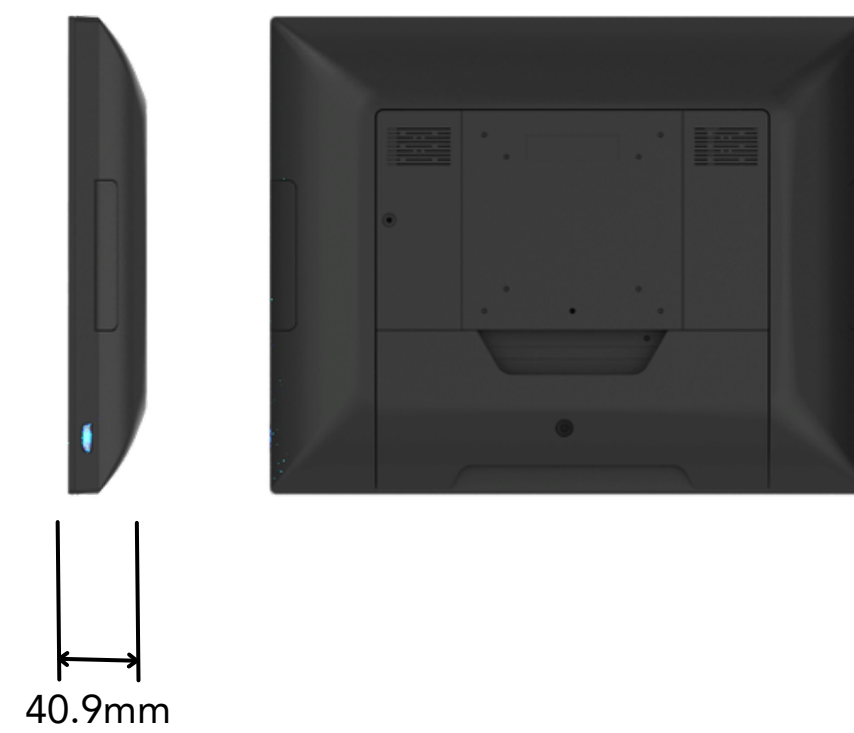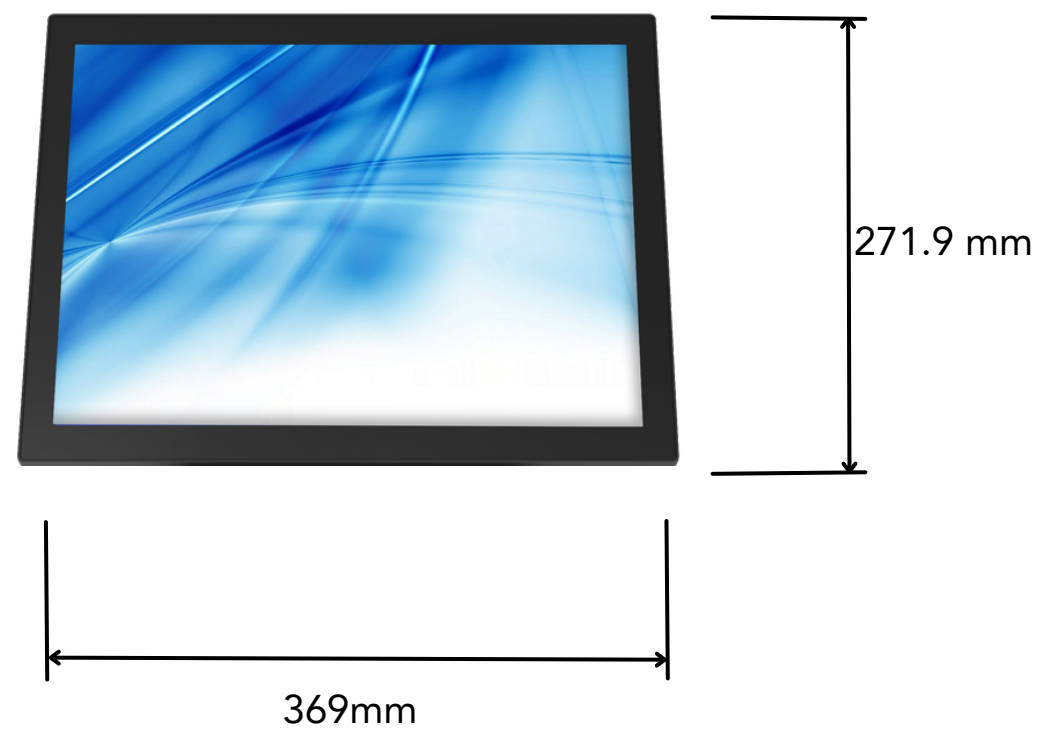

Specifications

Item		Parameter
System	Motherboard	G35
	Processor	Intel® Alder Lake N Processor: N95, i3-N305
	Memory	1x DDR4 8GB
	Storage	128GB SSD (M.2)
Display	Size and Resolution	15.1" 1024 x 768
	Touch Screen	True-Flat PCAP multi-touch
Expansion	M.2 (E Key)	1
I/O ports	USB Type-A	2 x USB3.0, 4 x USB2.0
	USB Type-C	1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A)
	Serial Port	3 x RJ48 (standard RS232) (default 0V; 5V,12V)
	LAN	1 x RJ45
	Cash Drawer	1 x RJ11
	FeDP	2 x proprietary miniDP (1 x for main display, 1 x for 2nd display)
	DC Jack	1 x 4PIN (with latch)
	Powered USB (Optional)	1x Powered USB 12V, 1x Powered USB 24V
Audio	Internal Speaker	1 x 3W

**Product specifications and data are subject to change without notice (E&OE)*

Specifications

Item		Parameter
Indicator	Power Button	1
Power	Power Adapter	65W/19V (120W/19V with 1x PUSB 12V & 1x PUSB 24V)
Communication	WLAN + BT (Optional)	802.11 series + BT5.0 (Optional)
Peripheral (optional)	MSR	3-Track MSR (USB)
	Fingerprint	Fingerprint Reader (USB)
	iButton	iButton (USB)
	Customer Display	LCM display 2 x 20 characters (USB)
	2nd Display	11.6" 2nd Display
Certificate	EMC & Safety	FCC Class A, CE Mark Class A, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing
Dimensions	W x H x D	369 x 277 x 203 mm (14.2" x 10.9" x 8.0")
Weight		4.3 kg
Mounting	VESA Mount	75 x 75, 100 x 100
OS Supported		Windows 11 IoT Enterprise, Linux, Android 13.0

**Product specifications and data are subject to change without notice (E&OE)*