

XP-4765W




XP-4765W




XPOS Plus Series

Narrow-Boarder
15.6" Full HD
TFT LCD

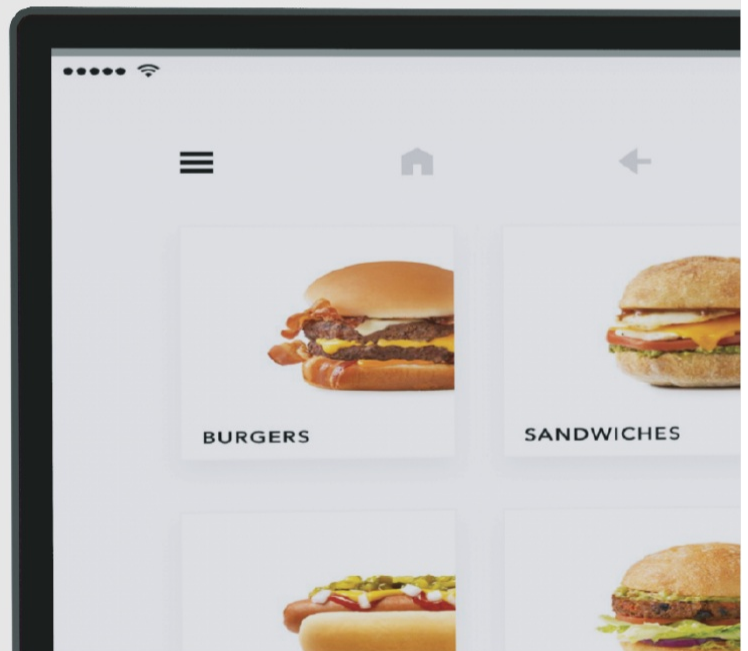


Patented Docking Stand

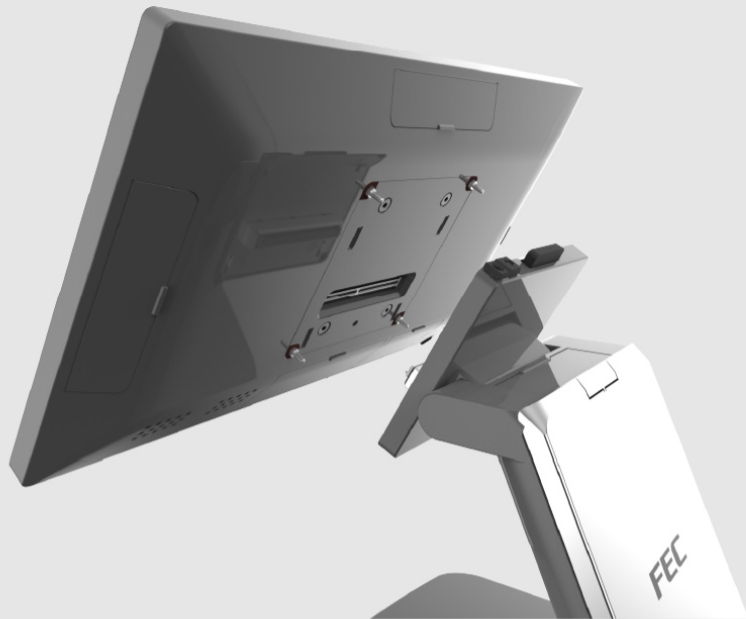


Main IO Inside The Stand

XP-4765W

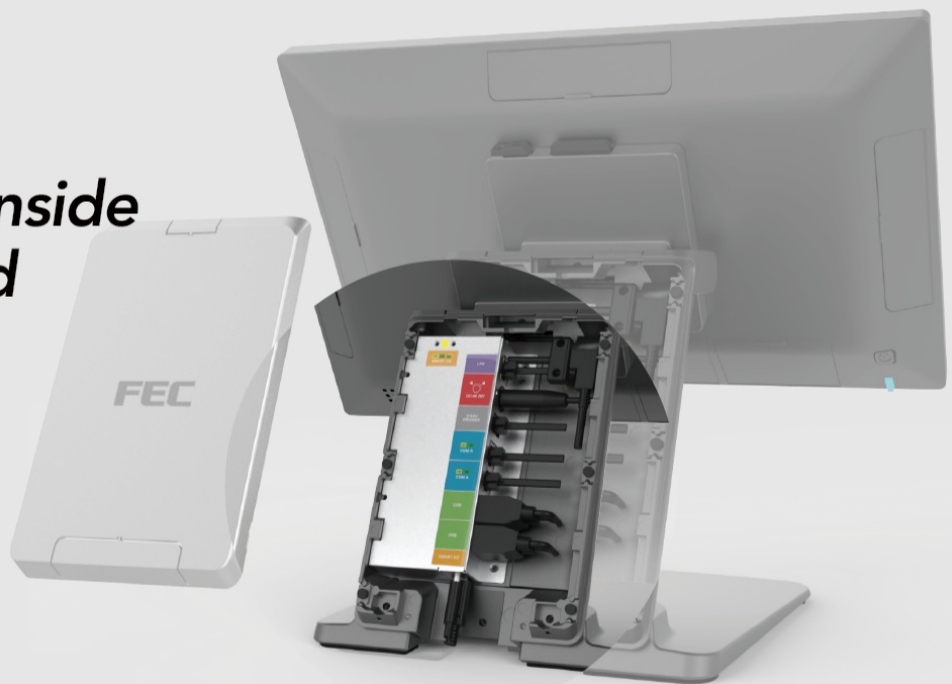




2nd Screen Mounting Options

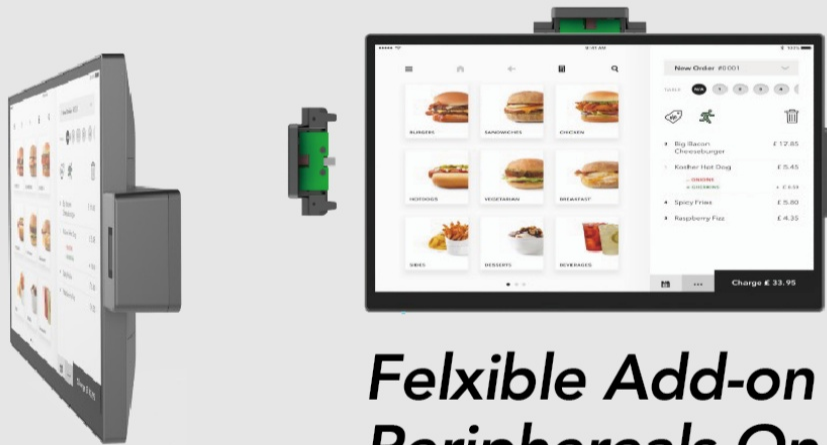

Felxible Add-on Periphereals On 3 Sides

2D Barcode Scanner/RFID Reader/Wi-Fi+BT Module
Camera+LED Bar 2-in-1 Module

Specifications



CPU

- Intel® Celeron® G6900
- Intel® Core™ i3-12100
- Intel® Core™ i3-12100TE
- Intel® Core™ i5-12400
- Intel® Core™ i5-12500TE
- Intel® Core™ i7-12700



Memory

- 4/8/16/32GB (Max 32GB; 2 x SO-DIMM DDR4)



Storage

- 1 x M.2 M Key PCIe GenIII



Speaker

- 2 x 2W Internal Speaker



Display

- 15.6" Slim Border TFT, 1920 x 1080



Touch

- True-Flat PCAP



Brightness/MTBF

- 350 nits / 50K Hours



Power

- 20V 90W or 130W External Adapter (DC-Jack) or 20V 100W (USB-C)



OS

- Windows 10 IoT Enterprise
- Windows 11 IoT Enterprise



Certification

- FCC, CE Class B, UKCA



Appearance

- Aluminum Die-Casting + Plastic
- Galaxy Grey



Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 140 °F)



Dimensions (W x H x D)

- Product: 360 x 312 x 233 mm
- In Carton: 437 x 295 x 318 mm



Weight

- Net: 5.1 kg
- Gross: 6.4kg



Port

- Default on PPC
 - 1 x Giga LAN (RJ45)
 - 1 x USB 3.0
 - 1 x HDMI
 - 1 x Smart-DD
 - 1 x 100W USB-C PD (DC-IN)
- Add-on Peripheral IO - Left / Right/ Top:
 - 3 x USB 2.0 Type C Connector
- Inside Stand Main IO Ports:
 - 2 x COM
 - 1 x Giga LAN (RJ45)
 - 2 x USB 2.0
 - 2 x USB 3.0
 - 1 x Cash Drawer (RJ11; 12V/24V)
 - 1 x Smart-IO
 - 1 x Smart-DD
 - 1 x 20V 90W/130W (DC-IN)



Optional

- Side Add-on Module Options:
 - Wi-Fi+BT Module(Wi-Fi 802.11 b/g/n/ac +BT 4.2)
 - RFID Reader
 - Camera+LED Bar 2-in-1
 - 2D Barcode Scanner



Other

- TPM 2.0: dTPM and fTPM