

Technical Accessory Guides (TAGs)

For Associates, Resellers, ISVs and Alliance Partners

Global



Version: All

Will show products that are known to be available for sale and discontinued products along with suggested replacements, when known

Need to provide an update or change?
Contact <mailto:pgw786@zebra.com>



For Internal Use by
PartnerConnect Members Only



TC53/TC58 Series Technical Accessory Guide



Does not include TC51/TC52/TC52x/TC52ax/TC56/TC57/TC57x accessories. See separate guide for these TC5X series accessories.
Does not include TC55 accessories. See separate guide for TC55 accessories.

NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.




* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.





Cradles and Charging



Single Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-NGTC5-2SC1B		Single Slot Charge-Only ShareCradle KIT	<ul style="list-style-type: none"> ▶ Will charge TC53/TC58 and a spare battery. ▶ Will charge standard size battery in device from 0-90% in as little as 1.5 hours ▶ Compatible with devices units with hand strap, Rugged Boot, Pistol Grip Handle attached. ▶ Kit includes: <ul style="list-style-type: none"> - Single Slot Charge-Only Cradle (CRD-NGTC5TC7-2SC1B) - Power Supply (PWR-BGA12V50W0WW) - DC Line Cord (CBL-DC-388A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) ▶ Connects to charge contacts on bottom of device. 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
CRD-NGTC5-2SE1B		Single Slot USB/Charging Cradle KIT	<ul style="list-style-type: none"> ▶ Will charge TC53/TC58 and a spare battery. ▶ Will charge standard size battery in device from 0-90% in as little as 1.5 hours ▶ Compatible with devices units with hand strap, Rugged Boot, Pistol Grip Handle attached. ▶ Kit includes: <ul style="list-style-type: none"> - Single Slot USB/Charging Cradle (CRD-NGTC5TC7-2SE1B) - Power Supply (PWR-BGA12V50W0WW) - DC Line Cord (CBL-DC-388A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) ▶ Connects to charge contacts and USB-C port on bottom of device. ▶ Can be enhanced to provide Ethernet communications by installing USB to Ethernet Module (MOD-MT2-EU1-01). 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version) ▶ For USB communication: Micro USB Cable (25-124330-01R)


<p>CRD-NTC5X-1SNWS-01 (cradle only)</p> <p>KT-CRD-NTC5X-1SNWS-01 (Kit)</p>		<p>Workstation Docking Cradle</p>	<ul style="list-style-type: none"> ▶ expected to be available October 2022 ▶ An enhanced single-slot charging cradle allowing users to use the TC53/TC58 as a workstation or kiosk. ▶ Cradle includes the following additional ports: <ul style="list-style-type: none"> - HDMI - Ethernet - 4 USB ports for keyboard, mouse, and other supported USB devices. - 3.5mm headset jack ▶ Kit includes: <ul style="list-style-type: none"> - Workstation Docking Cradle (CRD-NTC5X-1SNWS-01) - Power Supply (PWR-BGA12V50W0WW) - DC Line Cord (CBL-DC-388A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) ▶ Connects to charge contacts and USB-C port on bottom of device. 	<p><u>for cradle only</u></p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version) <p><u>for kit</u></p> <ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
<p>CRD-NTC5X-1SNHP-01 (cradle only)</p> <p>KT-CRD-NTC5X-1SNHP-01 (Kit)</p>		<p>Point of Sale (PoS) Cradle</p>	<ul style="list-style-type: none"> ▶ expected to be available October 2022 ▶ A hybrid poing of sale cradle allowing users to use the TC53/TC58 as a point of sale terminal. ▶ Cradle includes the following additional ports: <ul style="list-style-type: none"> - HDMI - Ethernet - 3 USB ports for keyboard, mouse, and other supported USB devices. - 1 24V powered USB port - 2 12V powered USB ports - 3.5mm headset jack ▶ Kit includes: <ul style="list-style-type: none"> - Workstation Docking Cradle (CRD-NTC5X-1SNHP-01) - Power Supply (PWR-BGA24V150W1WW) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) ▶ Connects to charge contacts and USB-C port on bottom of device. 	<p><u>for cradle only</u></p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA24V150W1WW) ▶ AC Line Cord (23844-00-00F or country specific version) <p><u>for kit</u></p> <ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
<p>MOD-MT2-EU1-01</p>		<p>USB to Ethernet Module</p>	<ul style="list-style-type: none"> ▶ Attaches to USB/Charging ShareCradle (CRD-NGTC5TC7-2SE1B) to provide Ethernet support ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. 	<p>USB/Charging ShareCradle Kit (CRD-NGTC5-2SE1B)</p>
Multi-Device Cradles				
Part Number	Picture	Description	Notes	Required Items

CRD-NGTC5-5SC5D		5-Slot Charge-Only ShareCradle KIT	<ul style="list-style-type: none"> ▶ Will charge up to five devices. ▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours. ▶ Does not charge spare batteries ▶ Compatible with devices with hand strap, Rugged Boot, or Pistol Grip Handle attached. ▶ Kit includes: <ul style="list-style-type: none"> - 5-Slot Charge-Only Cradle (CRD-NGTC5TC7-5SC5D) - Power Supply (PWR-BGA12V108W0WW) - DC Line Cord (CBL-DC-381A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5 ▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01) ▶ Connects to charge contacts on bottom of device. 	▶ AC Line Cord (23844-00-00F or country specific version)
CRD-NGTC5-5SC4B		5-Slot Charge-Only ShareCradle with Spare Battery Charging slot KIT	<ul style="list-style-type: none"> ▶ Will charge up to four devices and four spare batteries. ▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours. ▶ Compatible with devices with hand strap, Rugged Boot, or Pistol Grip Handle attached. ▶ Kit includes: <ul style="list-style-type: none"> - 5-Slot Charge-Only ShareCradle with Spare Battery Charger (CRD-NGTC5TC7-5SC4B) - Power Supply (PWR-BGA12V108W0WW) - DC Line Cord (CBL-DC-381A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 4 ▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01) ▶ Connects to charge contacts on bottom of device. 	▶ AC Line Cord (23844-00-00F or country specific version)
CRD-NGTC5-5SE5D		5-Slot Ethernet/Charging ShareCradle KIT	<ul style="list-style-type: none"> ▶ Allows network speeds up to 1 Gb ▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours. ▶ Does not charge spare batteries ▶ Compatible with devices with hand strap, Rugged Boot, or Pistol Grip Handle attached. ▶ Kit includes: <ul style="list-style-type: none"> - 5-Slot Ethernet+Charge Cradle (CRD-NGTC5TC7-5SE5D) - Power Supply (PWR-BGA12V108W0WW) - DC Line Cord (CBL-DC-381A1-01) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5 ▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01) ▶ Connects to charge contacts and USB-C port on bottom of device. 	

<p>CRDCUP-NGTC5-01 (single cup)</p> <p>CRDCUP-NGTC5-05 (set of 5 cups)</p>		<p>TC53/TC58 Charge-Only ShareCradle Cup Kit</p>	<ul style="list-style-type: none"> ▶ Can be used to replace a TC5X series cradle cup when migrating from TC5X to TC53/TC58 ▶ Can also be used to replace a damaged cradle cup or to create a multi-slot cradle supporting a mixed combination of devices (i.e. two TC21/TC26 and three TC53/TC58). ▶ Only compatible with cradles that use ShareCradle design (i.e. TC5X series). ▶ Kit includes: <ul style="list-style-type: none"> - ShareCradle Cup (CRDCUP-NGTC5TC7) - shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - screw for attaching cup to cradle 	
<p>SHIM-CRD-NGTC5</p>		<p>Replacement ShareCradle Cup Inserts/Shims (1 set of shims)</p>	<ul style="list-style-type: none"> ▶ Replacement cradle inserts/shims that are typically included with each TC53/TC58 ShareCradle. ▶ Includes 1 shim used with devices with boot and 1 shim used with devices without boot. ▶ Order to replace lost/damaged shims. ▶ Black color 	
<p>BRKT-SCRD-SMRK-01</p>		<p>5-Slot ShareCradle Mounting Bracket</p>	<ul style="list-style-type: none"> ▶ Allows for rack and wall mounting of one 5-Slot ShareCradle, up to four Single Slot ShareCradles, or up to four 4-Slot Battery Chargers. ▶ Bracket can be mounted on standard 19" network rack or on a wall. ▶ Has cable routing slots and removable power supply tray that stores and conceals power supplies. ▶ Adjustable tabs & screw mounts for easy hanging/installation. ▶ Adjustable orientations: <ul style="list-style-type: none"> - 25° High Density (5-Slot Charge Only Cradle) - Horizontal (Single Slot Cradle or 4-Slot Battery Chargers). ▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. 	
<p>ADP-TC7X-PLT-FX</p>		<p>5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell</p>	<ul style="list-style-type: none"> ▶ Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002). ▶ Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
<p>Battery Charging</p>				
Part Number	Picture	Description	Notes	Required Items


SAC-NGTC5TC7-4SCHG		4-Slot Battery Charger	<ul style="list-style-type: none"> ▶ Charges up to four spare Standard capacity or Extended capacity batteries ▶ Standard capacity batteries will charge from 0-90% in about 4 hours ▶ Can be used standalone or up to 4 Chargers can be mounted on Mounting Bracket (BRKT-SCRD-SMRK-01) 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
--------------------	---	------------------------	--	--

Direct to Device Charging


Part Number	Picture	Description	Notes	Required Items
CBL-TC5X-USBC2A-01 or CBL-TC2Y-USBC90A-01		USB-A to USB-C cable	<ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ Attaches to USB-C port on bottom of device ▶ Cable length is 1M (~3.25 ft.) ▶ CBL-TC2Y-USBC90A-01 features USB-A connector with a 90° bend allowing cable to be used in tighter locations. Cable length is about 1.1M (45"). 	

Communication Cables

Part Number	Picture	Description	Notes	Required Items
CBL-TC5X-USBC2A-01 or CBL-TC2Y-USBC90A-01		USB-C cable	<ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ Attaches to USB-C port on bottom of device. ▶ Cable length is 1M (~3.25 ft.) ▶ CBL-TC2Y-USBC90A-01 features USB-A connector with a 90° bend allowing cable to be used in tighter locations. Cable length is about 1.1M (45"). ▶ Can be used with USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) for in-vehicle charging. 	
CBL-TC2X-USBC-01		USB-C cable	<ul style="list-style-type: none"> ▶ Discontinued 10/2021, see PMB 10621 ▶ USB-A to USB-C cable ▶ Attaches to USB-C port on bottom of device. ▶ Cable length is 1.5M (~5 ft.) ▶ This cable includes an additional ferrite bead and is typically used with TC25 devices. 	
3rd party *		USB-C cable	<ul style="list-style-type: none"> ▶ Attaches to USB-C port on bottom of device. 	



25-124330-01R		Single Slot Cradle to PC/Host USB cable	<ul style="list-style-type: none"> ▶ Used with Single Slot USB/Charging Cradle ▶ Micro USB connection on cradle end 	
---------------	---	---	---	--




Snap-On Accessories





Part Number	Picture	Description	Notes	Required Items
TRG-NGTC5-ELEC-01		Pistol Grip Trigger Handle	<ul style="list-style-type: none"> ▶ Uses electrical trigger via contacts on back side of TC53/TC58. ▶ Trigger Handle accessory offers customers the option of using the product in a gun form factor, ideal for scan-intensive situations. ▶ Trigger Handle attaches to the mounts on the Rugged Boot (required) and device. ▶ Does not block access to rear facing camera and flash allowing camera to be used while using the trigger handle. ▶ Compatible with both Standard and Extended capacity batteries ▶ Optional Wrist Strap (SG-PD40-WLD1-01) also available. 	<ul style="list-style-type: none"> ▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)


Soft Goods - Cases/Holsters

Part Number	Picture	Description	Notes	Required Items
SG-NGTC5TC7-HLSTR-01		Soft Holster	<ul style="list-style-type: none"> ▶ Vertical orientation with Open Bucket design to accommodate TC53/TC58, device with optional Rugged Boot/Exoskeleton installed or device with optional Pistol Grip Trigger Handle. ▶ Strap on rear of holster allows adjustment for use with the accessory options mentioned above. ▶ Leather material. ▶ Includes Loop for storage of optional stylus. ▶ Non rotating for maximum durability. ▶ Holster includes cut-out for speaker output. 	

SG-NGTC5EXO1-01		<p>Rugged Boot/Exoskeleton</p> 	<ul style="list-style-type: none"> ▶ Boot increases drop spec of device to 6 ft. to concrete. ▶ Two piece design provides for an easier installation and snaps together to form boot. ▶ Required to be used with Pistol Grip Trigger Handle and RFID sleds. 	
varies		<p>Additional Rugged Boot/Exoskeleton options</p> 	<ul style="list-style-type: none"> ▶ Zebra can create a custom colored Rugged Boot to match your application or corporate color scheme. ▶ Have your Zebra representative submit a Custom Product Request. 	
SG-NGTC5-WMADP1-01		<p>Arm/Wrist Mount (Standard Strap)</p>	<ul style="list-style-type: none"> ▶ Allows device to be worn as a wearable device. ▶ Wearable design allows the user to have easy access to the device while having the ability to use both hands. ▶ Swivel design allows device to be viewed in Portrait or Landscape mode. ▶ Use of a Bluetooth Ring Scanner like the RS5100 is recommended. Allows for occasional use of device's built-in scanner while in mount. ▶ Uses BOA dial-to-fit design which is strong, durable, and easy to use. ▶ Velcro free design uses non-absorbent materials that can be wiped down. ▶ Includes Carrier, Comfort Pad (SG-NGWT-CMPD-01) and Small/Medium size Wrist Strap (SG-NGWT-WSTPST-01). ▶ White Dial and accent color on strap identify size as Standard (small-medium). ▶ Strap length can be adjusted between 128 to 191 mm (approx 5.0 to 7.5") ▶ It is typical for each user to have their own wrist mount (for hygiene). ▶ Same design and materials as WT6000 series wrist mounts. ▶ Must be used with Rugged Boot/Exoskeleton installed on device. ▶ Compatible with Standard and Extended Capacity Battery 	<p>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</p>

SG-NGTC5-WMADP1-02	coming soon	Arm/Wrist Mount (Extended Strap)	<ul style="list-style-type: none"> ▶ Allows device to be worn as a wearable device. ▶ Wearable design allows the user to have easy access to the device while having the ability to use both hands. ▶ Swivel design allows device to be viewed in Portrait or Landscape mode. ▶ Use of a Bluetooth Ring Scanner like the RS5100 is recommended. Allows for occasional use of device's built-in scanner while in mount. ▶ Uses BOA dial-to-fit design which is strong, durable, and easy to use. ▶ Velcro free design uses non-absorbent materials that can be wiped down. ▶ Includes Carrier, Comfort Pad (SG-NGWT-CMPD-01) and Medium/Large size Wrist Strap (SG-NGWT-WSTPLN-01). ▶ Black Dial and accent color on strap identify size as Extended (medium-large). ▶ Strap length can be adjusted between 164 to 265 mm (approx 6.5 to 10.5") ▶ It is typical for each user to have their own wrist mount (for hygiene). ▶ Same design and materials as WT6000 series wrist mounts. ▶ Must be used with Rugged Boot/Exoskeleton installed on device. ▶ Compatible with Standard and Extended Capacity Battery 	▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)
SG-NGWT-CMPD-02		Replacement Comfort Pad for wrist mount	<ul style="list-style-type: none"> ▶ Soft Rubber ▶ Easily removable ▶ Hygienic ▶ Improved design vs. SG-NGWT-CMPD-01 which now includes ridges in the top surface that assists with alignment during installation and reduces the occurrence of slippage, especially in the presence of sweat. 	
SG-NGWT-CMPD-01		Replacement Comfort Pad for wrist mount	<ul style="list-style-type: none"> ▶ Soft Rubber ▶ Easily removable ▶ Hygienic 	
SG-NGWT-WSTPST-01		Replacement Arm/Wrist Strap (standard size)	<ul style="list-style-type: none"> ▶ White Dial and accent color on strap identify size as Standard (small/medium) ▶ Strap length can be adjusted between 128 to 191 mm (approx 5.0 to 7.5") 	

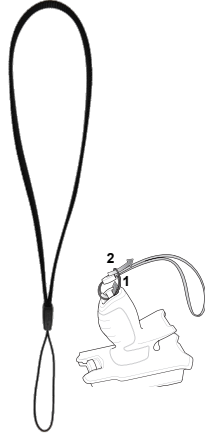

<p>SG-NGWT-WSTPLN-01</p>		<p>Replacement Arm/Wrist Strap (extended size)</p>	<ul style="list-style-type: none"> ▶ Black Dial and accent color on strap identify size as Extended (medium/large) ▶ Strap length can be adjusted between 164 to 265 mm (approx 6.5 to 10.5") 	
<p>SG-NGWT-WSTPXL-01</p>		<p>Replacement Wrist Strap (extra-large size)</p>	<ul style="list-style-type: none"> ▶ Blue Dial and accent color on strap identify size as extra-large. ▶ Strap length can be adjusted between 218 to 375 mm (approx 8.5 to 14.75") 	
<p>SG-WT4027050-01R</p>		<p>Arm Sleeve (pack of 5)</p>	<ul style="list-style-type: none"> ▶ Worn under wrist mount strap if worker is in short-sleeved shirt and wants: <ul style="list-style-type: none"> - Extra sweat wicking/ personal layer - Extra comfort - Extra slip-resistance ▶ Material will not snag ▶ One size fits all ▶ Washable in mild detergent. Should be air dried. ▶ Pack of 5 Arm Sleeves 	
<p>SG-NGTC5TC7-HDSTP-03 (pack of 3)</p>		<p>Hand Strap</p>	<ul style="list-style-type: none"> ▶ Allows device to be easily held in palm of hand. ▶ Can be attached to device two ways: <ol style="list-style-type: none"> 1. Attaches directly to TC53/TC58 device. 2. Attaches to Rugged Boot/ Exoskeleton ▶ Includes loop for holding optional stylus. 	

SG-PD40-WLD1-01		Wrist Strap for Trigger Handle	▶ Attaches to bottom of Pistol Grip Trigger Handle (TRG-NGTC5-ELEC-01)	
-----------------	---	--------------------------------	--	--

Vehicle Cradles and Holders

Powered Cradles and Holders (provides device charging and/or communication)



Part Number	Picture	Description	Notes	Required Items
CRD-TC58-WCVC-01		Charge-Only Vehicle Cradle - Wireless Charging	<ul style="list-style-type: none"> ▶ Device inserts bottom first and is retained by top latch. ▶ Uses four mounting screws with AMPSS hole pattern. ▶ Includes stylus holder (stylus not included) which can be mounted on left or right side of cradle or can be removed if not needed. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder. ▶ Only works with devices with Rugged Boot attached. ▶ Does not support Pistol Grip Handle. ▶ Only compatible with TC58 Premium configs which include wireless charging circuitry. 	<ul style="list-style-type: none"> ▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01) ▶ Wireless Charging Battery (BTRY-NGTC5TC7-44MAWC-01) ▶ For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for USB I/O Hub and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles ▶ For Mounting: Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options below.

<p>RAM-HOL-ZE17-2U (non-locking version)</p> <p>RAM-HOL-ZE17L-2U (locking version)</p> <p>(3rd party) *</p> <p>https://www.rammount.com</p>		<p>RAM Charge-Only Vehicle Cradle</p> 	<ul style="list-style-type: none"> ▶ Spring-loaded cradle allows easy one handed insertion and removal. ▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options. ▶ Compatible with devices with and without Rugged Boot/Exoskeleton attached. ▶ Includes stylus holder (stylus not included) which is fixed mounted on left side of cradle. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder. 	<ul style="list-style-type: none"> ▶ For Charging: RAM/GDS 2-Port USB Cigarette Charger (RAM-GDS-CHARGE-V10U) OR RAM/GDS Modular Hardwire Charger with Female USB Type A Connector (RAM-GDS-CHARGE-V7BU) ▶ For Mounting: RAM 2-hole AMPS pattern diamond ball mount (RAM-B-166U, RAM-B-238U or see RAM website for other options).
--	---	---	---	--

Un-Powered Cradles and Holders (passive holders, no charging support)

Part Number	Picture	Description	Notes	Required Items
CRD-TC5NG-NCCD-01		Vehicle Holder	<ul style="list-style-type: none"> ▶ Holds device in vehicle installations. ▶ Spring tension on holder. ▶ Provides access to USB-C port on bottom of device allowing device to be charged. ▶ Only works with devices with Rugged Boot attached. ▶ Does not support Pistol Grip Handle. 	<ul style="list-style-type: none"> ▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01) ▶ For Mounting: Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options below.




Vehicle Mounting Hardware

Part Number	Picture	Description	Notes	Required Items
RAM-B-166U		Vehicle Cradle Windshield Suction Cup Mount	<ul style="list-style-type: none"> ▶ RAM Twist Lock Suction Cup with Double Socket Arm and Diamond Base Adapter ▶ Overall Length: 6.75" ▶ Attaches to back of Vehicle Cradles 	
RAM-B-238U		Vehicle Cradle RAM Mount ball	<ul style="list-style-type: none"> ▶ RAM 2.43" x 1.31" Diamond Ball Base w/ 1" Ball ▶ Attaches to back of Vehicle Cradles 	Requires additional RAM hardware to mount vehicle cradle

3PTY-PCLIP-241476		ProClip Forklift/Vehicle Cradle Clamp Mount - for Pipe/Bar mounting	<ul style="list-style-type: none"> ▶ Attaches to circular pipes/bars of vehicles/forklifts. ▶ Accommodates bars from 3/4" to 1 1/8" diameter (19 to 30 mm). ▶ Uses AMPS hole pattern for mounting ProClip cradles like 3PTY-PCLIP-241475. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
3PTY-PCLIP-241477		ProClip Forklift/Vehicle Cradle Clamp Mount with Backplate - for Pipe/Bar mounting	<ul style="list-style-type: none"> ▶ Attaches to circular pipes/bars of vehicles/forklifts. ▶ Accommodates bars from 3/4" to 1 1/8" diameter (19 to 30 mm). ▶ Includes 3PTY-PCLIP-241476 with an attached backplate that uses AMPS hole pattern for mounting vehicle cradles. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
3PTY-PCLIP-241478		ProClip Forklift/Vehicle Cradle Clamp Mount - for square frame mounting	<ul style="list-style-type: none"> ▶ Attaches to square bars of vehicles/forklifts. ▶ Clamp is 5.125" x 3.75" and can accommodate bars of varying thicknesses. ▶ 6" long arm on clamp uses AMPS hole pattern for mounting ProClip cradles like 3PTY-PCLIP-241475. 	
3PTY-PCLIP-215500		ProClip Tilt Swivel Mount For TC7X/TC5X Vehicle Cradles	<ul style="list-style-type: none"> ▶ For mounting Vehicle Cradle on any flat surface. ▶ Angles/Tilts 15 degrees ▶ Swivels 360 degrees ▶ Extends 1 inch / 2.54 cm ▶ Base Plate and Face Plate has AMPS hole pattern ▶ Weight capacity 25 lbs / 11.34 kgs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.com (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)



<p>3PTY-PCLIP-710836</p>	 	<p>2" tall Pedestal Mounting Kit - Horizontal Adjustment, For TC7X/TC5X Vehicle Cradle</p> 	<ul style="list-style-type: none"> ▶ 2 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)</p>
<p>3PTY-PCLIP-710834</p>	 	<p>ProClip 4" tall Pedestal Mounting Kit For TC7X/TC5X Vehicle Cradles - Horizontal & Vertical Adjustment</p> 	<ul style="list-style-type: none"> ▶ 4 inch Solid-core Aluminum quick-adjust interlocking joints. ▶ Mount also features a 2 inch 90-degree offset extension rod to enable both horizontal and vertical adjustment to achieve optimal device/cradle positioning. ▶ AMPS hole pattern in mount bases ▶ Quick and easy installation ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)</p>
<p>3PTY-PCLIP-710835</p>	 	<p>4" tall Pedestal Mounting Kit For TC7X/TC5X Vehicle Cradles - Horizontal Adjustment</p> 	<ul style="list-style-type: none"> ▶ 4 inch Solid-core Aluminum quick-adjust interlocking joints. ▶ Mount also features a 2 inch Horizontal extension rod between mount bases ▶ AMPS hole pattern in mount bases ▶ Quick and easy installation ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)</p>

3PTY-PCLIP-241479		<p>ProClip Standard Duty 5\" Pedestal Mount</p> 	<ul style="list-style-type: none"> ▶ Standard Duty mount is designed to be used in smooth-riding vehicles and areas with low risk of external contact. ▶ Length of arm assembly is 5". ▶ Uses AMPS hole pattern for mounting ProClip cradles like CRD-TC56-CVCD2-02. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
3PTY-PCLIP-710837		<p>ProClip 6" tall Pedestal Mounting Kit - Horizontal & Vertical Adjustment, For TC7X/TC5X Vehicle Cradles</p>	<ul style="list-style-type: none"> ▶ 6 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
3PTY-PCLIP-710838		<p>ProClip 8" tall Pedestal Mounting Kit - Horizontal Adjustment, For TC7X/TC5X Vehicle Cradles</p>	<ul style="list-style-type: none"> ▶ 8 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
Misc				
Part Number	Picture	Description	Notes	Required Items





<p>SG-STYLUS-TCX-MTL-03 (pack of 3)</p>		<p>Fiber Tipped Stylus</p>	<ul style="list-style-type: none"> ▶ Black Passive Stylus with Zebra logo ▶ 5" length ▶ Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel. ▶ Can be used in rain. ▶ Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use. ▶ Big improvement over rubber tipped or plastic tipped stylus. ▶ Compatible with all capacitive touch screen devices. ▶ Can be tethered to device using SG-TC5NGTC7NG-TETHR-03. 	
<p>SG-TC5NGTC7NG-TETHR-03 (pack of 3)</p>		<p>Tether for Stylus</p>	<ul style="list-style-type: none"> ▶ String type tether prevents loss of stylus ▶ NOTE: Other Zebra coiled tethers are not recommended for use with TC53/TC58 as they may interfere with other accessories. 	
<p>SG-NGTC5-SCRNP-03 (pack of 3)</p>		<p>Screen Protectors</p>	<ul style="list-style-type: none"> ▶ Tempered glass ▶ Includes alcohol wipes, cleaning cloth and tools needed for screen protector installation. 	








Headset/Audio Accessories


Wired Headsets and Audio Accessories
 NOTE: Wired headsets with 2.5mm or 3.5mm jacks are not supported on TC58 devices since they do not include a headset jack. Only TC53 units include a headset jack.

Part Number	Picture	Description	Notes	Required Items
<p>HDST-USBC-PTT1-01</p>		<p>PTT Headset (USB-C connector)</p> 	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) applications. ▶ Compatible with Zebra PTT Express and PTT Pro. ▶ Connects to USB-C port on device. ▶ Rotating earpiece allows for right or left ear configuration. ▶ Provides PTT button, volume up/volume down buttons. ▶ Cable length is 32 in. (81 cm) ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. 	

<p>HDST-35MM-PTT1-01</p>		<p>PTT and VoIP Headset (3.5mm Standard jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony. ▶ Compatible with Zebra PTT Express and PTT Pro. ▶ Uses standard 3.5mm jack. ▶ Rotating+C183:D183 earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. 	
<p>HDST-35MM-PTVP-01</p>		<p>PTT and VoIP Headset (3.5mm Locking jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony. ▶ Compatible with Zebra PTT Express and PTT Pro. ▶ Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection. ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. 	<ul style="list-style-type: none"> ▶ 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)
<p>SL+1W-3.5WA (3rd party) *</p> <p>https://workforceaudio.com</p>		<p>Workforce Audio SnapLock PTT Adapter Cable</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) applications. ▶ Compatible with Zebra PTT Express and PTT Pro. ▶ 3.5 mm jack ▶ Adapter cable provide SnapLock connector which accepts a variety of Workforce Audio's earpieces. ▶ includes clip for attaching PTT button to clothing 	<p>Requires purchase of earpiece for connecting to cable.</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS2100 Rugged Wired Headset</p>	<ul style="list-style-type: none"> ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene 	<ul style="list-style-type: none"> ▶ 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) ▶ HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>



<p>VR12 (3rd party) * http://www.blueparrott.com</p>		<p>BlueParrott VR12 Wired Noise Cancelling Headset</p>	<ul style="list-style-type: none"> ▶ Audio accuracy for voice picking and other speech recognition applications. ▶ High quality durability stands up to all-day, every-day use. ▶ Lightweight design is easy and comfortable to wear all day. ▶ Compatible with most major wearable computers and devices used in voice-picking environments. ▶ G type (GN Netcom) Quick Disconnect. ▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles 	<p>For 3.5mm locking jack (recommended): 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p>For 2.5mm jack: 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>
<p>RCH51</p>		<p>Rugged Cabled Headset</p>	<ul style="list-style-type: none"> ▶ Discontinued 12/2018, now use HS2100 series - PMB 2981 ▶ For VoIP use only, not Push-To-Talk (PTT) ▶ Improved to withstand chemicals in certain hair gels ▶ Noise cancelling microphone filters ambient noise inches away ▶ Extremely rugged strain relief features ensure cable bend tolerance, even at -30C ▶ IP67 sealing throughout the headset protects sensitive components from moisture and dust ▶ High-strength plastics survive 6' drop at -30C & 500 tumbles ▶ Weight: 4 oz. ▶ See RCH50/RCH51 Accessories Document for additional accessories 	<p>For 3.5mm locking jack (recommended): 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p>For 2.5mm jack: 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>
<p>RCH50</p>		<p>Rugged Cabled Headset</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2011, now use RCH51 ▶ Noise cancelling microphone filters ambient noise inches away ▶ Extremely rugged strain relief features ensure cable bend tolerance, even at -30C ▶ IP67 sealing throughout the headset protects sensitive components from moisture and dust ▶ High-strength plastics survive 6' drop at -30C & 500 tumbles ▶ Weight: 4 oz. ▶ See RCH50 Accessories Document for additional accessories 	<p>For 3.5mm locking jack (recommended): 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p>For 2.5mm jack: 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>
<p>50-11300-050R</p>		<p>Noise Cancelling Headset</p>	<ul style="list-style-type: none"> ▶ Discontinued 8/2011, now use RCH50 	<p>For 3.5mm locking jack (recommended): 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p>For 2.5mm jack: 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>

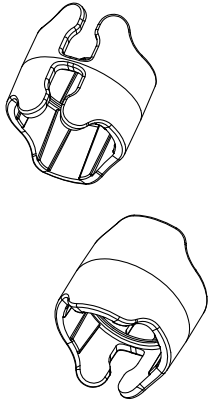


<p>3PTY-VXI-VR12 (Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrot VR12 Wired Noise Cancelling Headset</p> 	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS2100 series - PMB 10005 ▶ Audio accuracy for voice picking and other speech recognition applications. ▶ High quality durability stands up to all-day, every-day use. ▶ Lightweight design is easy and comfortable to wear all day. ▶ Compatible with most major wearable computers and devices used in voice-picking environments. ▶ G type (GN Netcom) Quick Disconnect. ▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles 	<p>For 3.5mm Locking jack (recommended): 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p>For 2.5mm jack: 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> ▶ 3.5mm barrel jack connector ▶ For use with TC5X, TC7X, TC8000, or other devices using a 3.5mm barrel jack audio connector ▶ Cable is 43" (1.1 M) long ▶ Rugged cable with rugged connectors that are keyed/collared for a locking failsafe connection. ▶ Includes one clothing clip. Additional clips can be purchased separately. 	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</p>
<p>25-124387-02R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector. ▶ Updated cable minimizes cross talk and intermittency issues. 	<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)</p>
<p>25-124387-01R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Discontinued 9/2013, now use 25-124387-02R ▶ Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector. 	<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)</p>
<p>ADP-35M-QDCBL1-01</p>		<p>RCH50/RCH51 Quick Disconnect Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector. ▶ Cable features a rugged keyed/collared jack for a locking failsafe connection. 	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</p>
<p>CBL-TC51-HDST35-01</p>		<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (3.5mm jack)</p>	<ul style="list-style-type: none"> ▶ Provides a collared/keyed 3.5mm barrel jack connector. ▶ Required for use with some headsets (i.e. HS2100) that use a locking keyed connector on the headset jack. ▶ Cable is approximately 6 inches long ▶ Includes Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01) 	

ADP-LOCK-3.5HT1-01		Spare/Replacement 3.5mm Audio Adapter Retention and Anti-Rotation Lock	<ul style="list-style-type: none"> ▶ This clip is used with the Keyed/Collared Female to Male Headset Adapter Cable (CBL-TC51-HDST35-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection. ▶ Clip is normally included with the Keyed/Collared Female to Male Headset Adapter Cable, this is a spare/replacement clip/lock. ▶ NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order. 	
--------------------	---	--	--	--











Bluetooth Headsets and Audio Accessories

NOTE: Bluetooth headsets with PTT function not supported by Zebra PTT Express application. Check with Engineering to verify compatibility with Zebra PTT Pro application.

Part Number	Picture	Description	Notes	Required Items
See HS2100-HS3100 Accessories Document		HS3100 Rugged Bluetooth Headset for VDP applications	<ul style="list-style-type: none"> ▶ HD Voice, also known as Wide Band Audio, brings incredible audio clarity ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation tuned for VDP (voice directed picking) applications. ▶ Not designed for the aggressive noise cancellation required for VoIP or voice calls. Headset's send level is not tuned to satisfy VoIP or voice standards and will result with audio being quieter at the far end and delivering more noise. ▶ Swap batteries on the fly — without losing the Bluetooth connection ▶ Split-second tap-to-pair simplicity using NFC. ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene ▶ 15 hours of battery power 	See HS2100/HS3100 Accessories Document for headset accessories
various Bluetooth models B550-XT B350-XT C400-XT C300-XT (3rd party) * http://www.blueparrott.com		BlueParrott Bluetooth Headsets	<ul style="list-style-type: none"> ▶ Various Bluetooth models available with options that include: <ul style="list-style-type: none"> - Blocking out 96% of background noise - Over 24 hours of talk time - NFC Tap to Pair capable - Bluetooth wireless range capable up to 300 ft. - Convertible wearing options: over the head, behind the neck. See BlueParrot site for model specific options.	


<p>3PTY-VXI-B350XT (Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 24 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) ▶ Zebra Compatible certification for VDP application use with MC32. 	
<p>3PTY-VXI-B250XTP (Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 20 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) 	
<p>3PTY-VXI-EXPWAYII (Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 8 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) ▶ Zebra Compatible certification for VDP application use with MC92, VC70, WT41 and MC32. 	
<p>APTT1 (3rd party) *</p> <p>https://www.aina-wireless.com/</p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Features several buttons which the application developers can assign to different functions. ▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts. ▶ Device is ruggedized, MIL-STD 810G and IP67. ▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ Can be easily paired to mobile computer using NFC tap-to-pair. 	





<p>H3-B-1 (3rd party) *</p> <p>https://www.dellking.com</p>		<p>Wandfu H3 Push-To-Talk (PTT) Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. 	
<p>BTR-155 (3rd party) *</p> <p>https://www.savoxaccessories.com</p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Rugged wireless speaker microphone IP55. ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap 	
<p>BTH-101 (3rd party) *</p> <p>https://www.savoxaccessories.com</p>		<p>Savox Push-To-Talk (PTT) Bluetooth Headset</p>	<ul style="list-style-type: none"> ▶ Bluetooth headset designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Also operates as standard Bluetooth headset for taking phone calls. ▶ Device is lightweight and ruggedized, IP55. 	
<p>Power Cords/Power Supplies</p>				
<p>AC Cords and Power Supplies</p>				
Part Number	Picture	Description	Notes	Required Items



CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power Single Slot Cradles and 4-Slot Battery Chargers when using Level VI Efficiency power supply (PWR-BGA12V50W0WW) ▶ Cable length is 1.8 meters ▶ NOTE: All TC5X Cradles include this cable. 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Replaces PWRS-14000-148R ▶ Used to power Single Slot Cradle and 4-Slot Battery Charger ▶ 100-240 VAC, 12VDC, 3.33A ▶ Level VI Efficiency rated ▶ NOTE: All TC5X Cradles include this power supply. 	<ul style="list-style-type: none"> ▶ DC Power Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
PWRS-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 1/2017, now use PWR-BGA12V50W0WW and CBL-DC-388A1-01 - see PMB 2923 and PMB 2851 ▶ Replaces KT-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger ▶ 100-240 VAC, 12VDC, 3.33A ▶ Energy Star Compliant 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
50-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by KT-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
KT-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Replaces 50-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger ▶ Discontinued 12/2010 - now use PWRS-14000-148R 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW) ▶ NOTE: All TC5X Multi-Slot ShareCradles include this cable. ▶ This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles. 	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW) ▶ Cable has black extension tab for releasing the cable from the back of the cradle. This isn't required when using Multi-Slot ShareCradles. ▶ CBL-DC-381A1-01 is normally used with TC53/TC58 multi-device cradles. 	
50-16002-029R		DC Power Cord	<ul style="list-style-type: none"> ▶ Not used on TC5X, now use CBL-DC-382A1-01 ▶ Used to power 5-Slot ShareCradles 	
CBL-DC-523A1-01		2-Way DC Y Power Cord	<ul style="list-style-type: none"> ▶ Used to power two 4-Slot Battery Chargers from one Power Supply (PWR-BGA12V108W0WW) 	

25-85993-01R		2-Way DC Y Power Cord	<ul style="list-style-type: none"> ▶ Used to power two 4-Slot Battery Chargers from one Power Supply (PWRS-14000-241R) ▶ Discontinued 2/2017, now use CBL-DC-523A1-01 - PMB 2851 and 2933 	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Replaces PWRS-14000-241R ▶ Used to power 5-Slot ShareCradles or two 4-Slot Spare Battery Chargers ▶ 9A, 108W ▶ Level VI Efficiency rated ▶ NOTE: All TC5X Cradles include this power supply. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01 or CBL-DC-523A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
PWRS-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Not used on TC5X, now use PWR-BGA12V108W0WW and CBL-DC-382A1-01 ▶ Replaces 50-14000-241R ▶ Used to power 5-Slot ShareCradles or two 4-Slot Spare Battery Chargers ▶ 100-240VAC, 12VDC, 9A ▶ Energy Star Compliant 	<ul style="list-style-type: none"> ▶ DC Line Cord (50-16002-029R or 25-85993-01R) ▶ AC Line Cord (23844-00-00F or country specific version)
50-14001-004R		Power Supply	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by 50-14000-241R ▶ Used to power 5-Slot ShareCradles or two 4-Slot Spare Battery Chargers 	<ul style="list-style-type: none"> ▶ DC Line Cord (50-16002-029R or 25-85993-01R) ▶ AC Line Cord (23844-00-00F or country specific version)
50-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Replaces 50-14001-004R ▶ Used to power 5-Slot ShareCradles or two 4-Slot Spare Battery Chargers ▶ Discontinued 12/2010 - now use PWRS-14000-241R 	<ul style="list-style-type: none"> ▶ DC Line Cord (50-16002-029R or 25-85993-01R) ▶ AC Line Cord (23844-00-00F or country specific version)
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> ▶ Used to power Cradles. ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style) PWR-WUA5V12W0KR (Korea plug style) PWR-WUA5V12W0BR (Brazil plug style)		USB Power Supply	<ul style="list-style-type: none"> ▶ Used with USB-C Cable (CBL-TC5X-USBC2A-01) to charge device. ▶ Provides higher current (2.5A) for faster charging ▶ 100-240 VAC, 5 V, 2.5 A 	

In-Vehicle Power Supplies








Part Number	Picture	Description	Notes	Required Items
CHG-AUTO-USB1-01 CHG-AUTO-USB1-BR (for Brazil)		USB Cigarette Lighter Adapter	<ul style="list-style-type: none"> ▶ Used with USB-C Cable (CBL-TC5X-USBC2A-01) to charge device. ▶ Includes two USB A ports providing higher current (2.5A) for faster charging 	

CHG-AUTO-CLA1-01		Cigarette Lighter Auto Charger Cable for USB I/O Hub	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to USB I/O Hub (SHARE-USBH-01). ▶ Only compatible with USB I/O Hub (SHARE-USBH-01) which then powers TC5X Charge-Communication Vehicle Cradle (CRD-TC56-UVCD1-01) 	
CHG-AUTO-HWIRE1-01		Hard Wired Auto Charger Cable for USB I/O Hub	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to USB I/O Hub (SHARE-USBH-01). ▶ Bare wire end connects directly to vehicle power source. ▶ Only compatible with USB I/O Hub (SHARE-USBH-01) which then powers TC5X Charge-Communication Vehicle Cradle (CRD-TC56-UVCD1-01) ▶ Approximate cable length is 13 ft. 	
CBL-TC7X-GFS-01		Zebra Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ▶ Allows TC5X Vehicle Cradles to use power cables from legacy Zebra device vehicle cradles including: MC5x/MC6x, MC7x, MC9x-Brick, MC9x-Short, or MC95 which use cable SKUs 25-128973-01R, 25-61987-01R, or 25-128974-01R. ▶ Cable length is 11.5" ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
ADPCBL-TC7X-USPS		Honeywell Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ▶ Allows TC5X Vehicle Cradles to use power cables from legacy Honeywell vehicle cradles providing 12V - typically Honeywell 99ex. ▶ Cable length is about 12". ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	

<p>VAM-MPP-VHCH1-01</p> <p>(CPR required for use with TC5X)</p>		<p>Vehicle Charger Cable for USB I/O Hub and ZQ500/QLn Series Printers</p>	<p>►Charger with charge both the USB I/O Hub (SHARE-USBH-01) a ZQ500 or QLn series printer.</p> <p>► Includes the following:</p> <p>(1) Power Supply (P1093358) which has square locking connector and one USB-A port which can be used to charge an additional device.</p> <p>(2) cable for charging USB I/O Hub (SHARE-USBH-01) (includes tab on Barrel jack end for ensuring a reliable connection to the cradle) and ZQ500/QLn printer</p> <p>(3) cable for charging TC7X Charging Cable Cup, Serial/Charge Cable, or USB/Charge Cable Cups and ZQ500/QLn printer - will not be used with TC5X.</p> <p>(4) Cigarette Lighter Adapter power cord</p> <p>(5) Hard Wired (bare wire) power cord</p> <p>Choose preferred power cord (4) or (5)</p> <p>► NOTE: This charging solution has not been officially validated with the TC5X. Please submit a CPR at http://cpr.zebra.lan (Zebra internal site) if you would like to use this cable with the TC5X.</p>	
<p>16411 (12-32 VDC input)</p> <p>16412 (20-60 VDC input)</p> <p>16515 (72-110 VDC input)</p> <p>Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Lind 12V Isolated Power Supply for Vehicle Cradles</p>	<p>► Typically used when powering USB I/O Hub (SHARE-USBH-01) + TC5X Charge-Communication Vehicle Cradle (CRD-TC56-UVCD1-01) from higher voltage vehicles.</p> <p>► Provides 12V DC output required by cradle.</p>	

Batteries

Part Number	Picture	Description	Notes	Required Items
<p>BTRY-NGTC5TC7-44MA-01</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4400 mAh)</p>  	<p>► Designed, manufactured & tested to meet rigorous controls & standards</p> <p>► Premium-grade cells with higher capacity & longer life cycle</p> <p>► Designed to help prevent overcharging & electrical shock</p> <p>► Strong & robust housing for optimal performance & durability</p> <p>► Information available:</p> <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device). - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). 	

<p>BTRY-NGTC5TC7-44MABLE-01</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4400 mAh) and BLE beacon</p> 	<ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Includes Bluetooth beacon allowing device to be located while powered off using solutions like Zebra Device Tracker. ▶ Battery purchase is eligible for discounted Device Tracker 1-year or 3-year subscription. See PMB 10837 for details. 	 <p>▶ Typically purchased along with a Device Tracker 1-year or 3-year subscription. Battery is eligible for a discounted Device Tracker subscription:</p> <p>SW-BLE-DT-SP-1YR (1 year) or SW-BLE-DT-SP-3YR (3 year)</p> <p>See PMB 10837 for details.</p>
<p>BTRY-NGTC5TC7-44MAWC-01</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4400 mAh) and Wireless Charging</p> 	<ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Includes support for wireless charging Requires TC58 Premium config which includes wireless charging circuitry. 	
<p>BTRY-NGTC5TC7-66MA-01</p>		<p>Spare 1.5X Extended Capacity Battery with PowerPrecision Plus (6600 mAh)</p> 	<ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). 	